HUMONGOUS FAN TECHNICAL SPECIFICATIONS

Technical Specification	ns				
Fan Diameter	8 ft.	12 ft.	16 ft.	20 ft.	24 ft.
Number of Airfoils	8 Airfoils				
Color Options		Brushed Alumi	num /White / Black / R	ed / Yellow / Blue	
Fan Weight	106 lbs.	124 lbs.	140 lbs.	218 lbs.	262 lbs.
Motor Enclosure	Totally Enclosed Fan-Cooled				
Motor Power	0.5 HP			1.5 HP	3.0 HP
Maximum RPM	44 RPM	44 RPM	44 RPM	49 RPM	62 RPM
Sound Level (dBA)**	<57 dBA	<57 dBA	<57 dBA	< 59 dBA	< 59 dBA
CFM	15899	48759	92298	183620	259438
Direct Breeze Region ***	28 - 32 ft. diameter	42 - 48 ft. diameter	56 - 64 ft. diameter	70 - 80 ft. diameter	90 – 100 ft. diameter
Electrical Frequency	60 Hz	60 Hz	60 Hz	55 Hz	50 Hz
Input Power	110-120V, 1φ: 13.0 A 208-240V, 1φ: 6.4 A 208-240V, 3φ: 3.7 A 460-480V, 3φ: 1.85 A			208-240V, 1φ: 12.3 A 208-240V, 3φ: 7.12 A 460-480V, 3φ: 3.50 A	208-240V, 3φ: 12.0 A 460-480V, 3φ: 6.0 A
Motor Maximum Full Load Amps	208-240V, 3φ: 1.90 A 460-480V, 3φ: 0.95 A			208-240V, 3φ: 4.20 A 460-480V, 3φ: 2.10 A	208-240V, 3φ: 9.39A 460-480V, 3φ: 4.68A
Minimum Airfoil Clearances	Sides: 2 ft. Ceiling: 3-4 ft.	Sides: 2 ft. Ceiling: 3-4 ft.	Sides: 2ft. Ceiling: 3-4 ft.	Sides: 2 ft. Ceiling 4-6 ft.	Sides: 2 ft. Ceiling 6-8 ft.
Standard Mount	I-Beam/Z-Purlins/Open Joist				
Extensions	1 ft., 2 ft., 3 ft., and 6 ft. Mounting Extensions Available				
Controller	NEMA 1 Wall Mounted VFD w/Safety Disconnect, On/Off Toggle and Speed Pot				
Safety Features	Safety Cable, Hub Clips, Hub Retainer, Dual-Method Fastening of all Joined Components, Integrated Sprinkler Shut-Off				
Warranty	5 Years All Parts				

** dBA measurements taken directly beneath units running at 3/4 speed in an active work environment.

*** For applications in which breeze production/ventilation is the foremost consideration, applies to operation at 1/2 max speed with a clear floor. **** For applications in which heating/cooling cost reduction is the foremost consideration


www.humongousfan.com

216.663.8830


23103 Miles Road, Cleveland, Ohio 44128

STANDARD MOUNT - NO EXTENSION

MOUNTING EXTENSION 1',2',3' and 6' Kits Standard, Modifications to Order

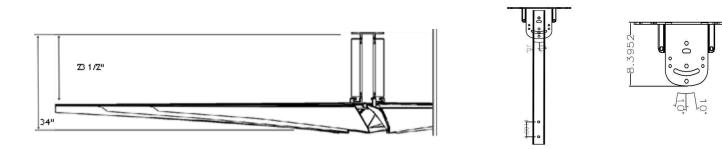

SHORT MOUNT - NO EXTENSION - 0.5 HP



LONG MOUNT - NO EXTENSION - 1.5 TO 3 HP

